

# Digital 1-Channel Piezo Controller

High Output Power for Dynamic Operation, Capacitive Sensors



## E-709.CHG

- Output power up to 50 W
- Linearity error maximum of 0.02 %
- Fast 25 Mbit/s serial interface
- Comprehensive I/O functions
- Extensive software package

### Fast piezo controller

1 channel. For piezo-based nan positioning systems with capacitive sensors. High output current for dynamic applications. Digital controller. Voltage range -30 to 130 V.

### Interfaces

USB, RS-232, fast serial interface with up to 25 MBit/s. Additional high-bandwidth analog control input / sensor input. Analog output, e.g., for external amplifiers.

### User software and functions


PIMikroMove, PI General Command Set (GCS). Drivers for NI LabVIEW, shared libraries for Windows and Linux. Compatible with µManager, MATLAB. Wave generator. Linearization. Data recorder. Autozero. Trigger I/O. Software-configurable parameters.

## Specifications


E-709.CHG	
Function	Digital, high dynamics controller for single-axis piezo nan positioning systems
Axes	1
Processor	DSP 32-bit floating point, 150 MHz
Supported functions	Wave generator, data recorder, autozero, trigger I/O
Servo controller and sensor	
Controller type	PID, two notch filters, sensor linearization
Sampling rate, servo control	10 kHz
Sampling rate, sensor	10 kHz
Sensor type	Capacitive

Servo controller and sensor	E-709.CHG
Linearization	5th order polynomials
Sensor bandwidth	5 kHz
Sensor resolution	16-bit
External synchronization	Yes
Amplifier	E-709.CHG
Output voltage	-30 to 130 V
Peak power (<2 ms)	50 W
Average output power (>5 ms)	15 W
Peak current (<2 ms)	500 mA
Average output current (>5 ms)	160 mA
Current limitation	Short-circuit proof
Resolution DAC	17-bit
Interfaces and operation	E-709.CHG
Communication interfaces	USB, RS-232, SPI
Piezo / sensor connector	D-sub special 7W2
Analog input socket	SMB
Sensor monitor socket	SMB
I/O connector	HD D-sub 26 (f) 1 analog input 0 to 10 V (configurable) 1 analog output 0 to 10 V (configurable) 1 monitor piezo voltage -0.3 to 1.3 V 1 digital input (LVTTTL, programmable) 5 digital outputs (LVTTTL, 3 × predefined, 2 × programmable)
Command set	PI General Command Set (GCS)
User software	PIMikroMove
Application programming interfaces	C, C++, C#, MATLAB, NI LabVIEW, Python; supported by MATLAB, µManager, Andor iQ
Display and indicators	Status LED, overflow LED
Miscellaneous	E-709.CHG
Operating temperature range	5 to 50 °C
Dimensions	320 mm × 150 mm × 80 mm
Mass	2.5 kg
Operating voltage	24 V DC, included in the scope of delivery: external power adapter
Max. power consumption	45 W

## Drawings / Images

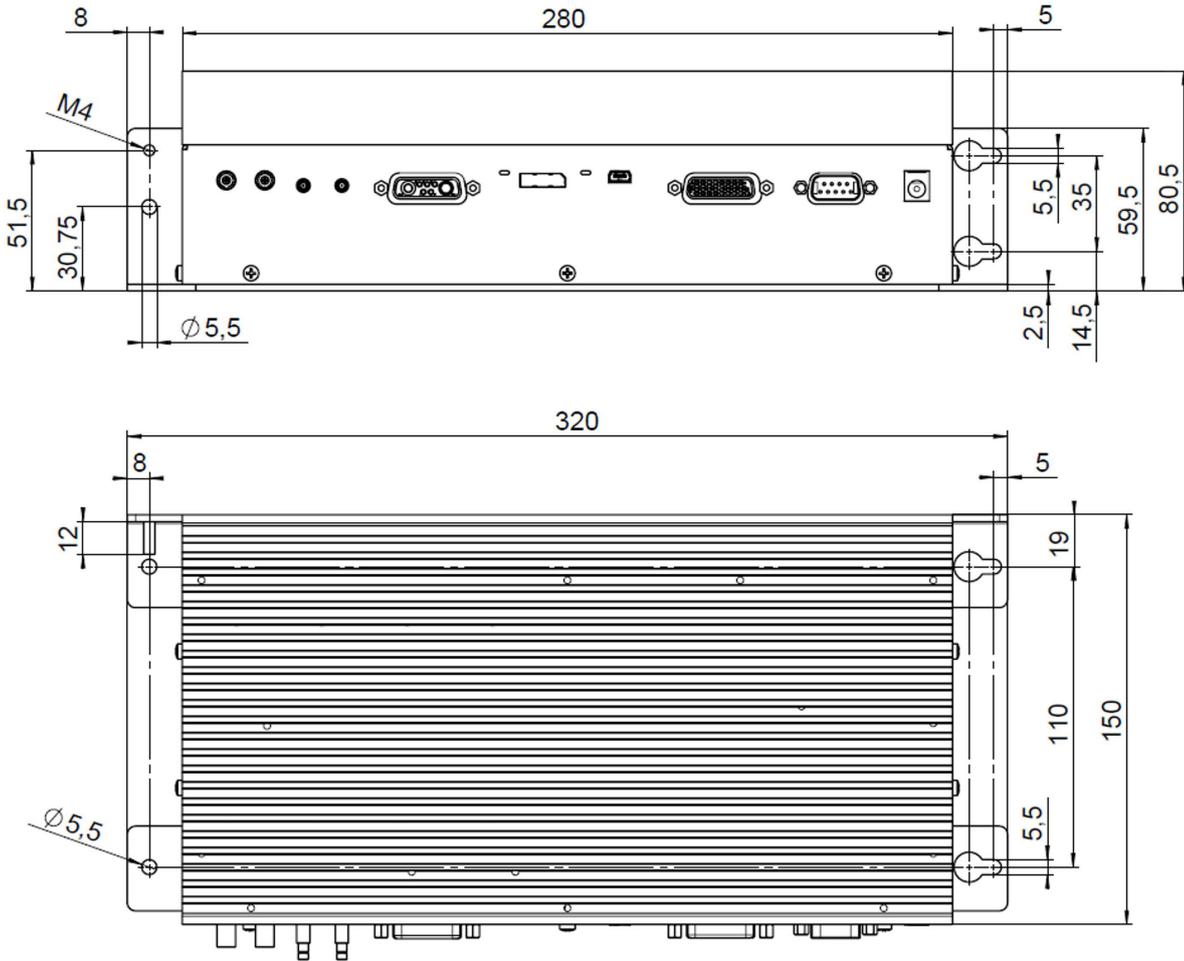

E-709.CHG: dimensions in mm. Note that a comma is used in the drawings instead of a decimal point.

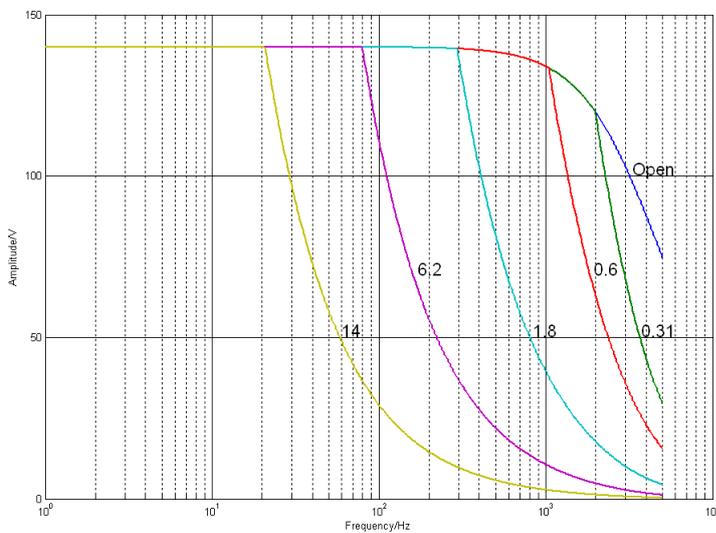

E-709.CHG: Operating limits (open loop) with various piezo loads, capacitance values in  $\mu\text{F}$

## Ordering Information

### **E-709.CHG**

Digital piezo controller, 1 channel, -30 to 130 V, capacitive sensor, high power output, benchtop device